



Republic of the Philippines
 DEPARTMENT OF PUBLIC WORKS AND HIGHWAYS
ZAMBOANGA DEL NORTE
2nd DISTRICT ENGINEERING OFFICE
 REGIONAL OFFICE IX
 Sta. Isabel, Dipolog City

APPROVED BUDGET FOR THE CONTRACT (ABC)
 Summary of Costs

Fill out all the spaces provided. Write (N/A) if not applicable.

No.	Item	Cost
1	Actual Market Price of Product	PHP 997,149.72
2	Incidental Expenses	
	• Taxes/Customs/Duties	N/A
	• Licenses/Registration	N/A
	• Insurance	N/A
	• Storage/Freight/Hauling	N/A
	• Installation/Removal	N/A
	• Training Costs	N/A
	• Cost of Inspection	N/A
	• Others: (Specify)	
3	Cost of Money/Adjustment for Inflation	N/A
4	Discounts (for Bulk Buying)	N/A
5	Spare Parts/Maintenance Costs/Warranty	N/A
6	Adjustment for currency valuation (if procured from a foreign country/abroad)	N/A
7	Life cycle cost	N/A
	Grand Total	PHP 997,149.72

Prepared by:


ILDE DEXE T. ALFARO
 Engineer III/Maintenance Section

Approved by:


AMINODIN P. MANIRI
 District Engineer



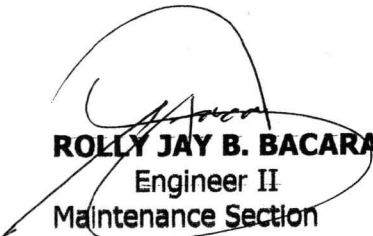
Republic of the Philippines
DEPARTMENT OF PUBLIC WORKS AND HIGHWAYS
ZAMBOANGA DEL NORTE
2ND DISTRICT ENGINEERING OFFICE
REGIONAL OFFICE IX
Sta. Isabel, Dipolog City

Technical Specifications for **EMULSIFIED ASPHALT CSS-1**

Type: Slow-Setting
Grade: Cationic
Standard: ASTM D2397M -13

TECHNICAL SPECIFICATIONS	MINIMUM REQUIRED		
	MINIMUM	MAXIMUM	TEST METHOD
TEST ON EMULSIONS			
Viscosity, Saybolt Furol at 25 °C	20	100	ASTM D244
Storage Stability test, 24-h, %	-	1	ASTM D6930
Particle charge Test	POSITIVE		ASTM D244
Sieve Test, %	-	0.1	ASTM D6933
Cement Mixing Test, %	-	2.0	ASTM D6935
DISTILLATION			
Residue, %	57	-	ASTM D244
TEST ON RESIDUE FROM DISTILLATION TEST			
Penetration 77°F (25 °C) 100g, 5s mm	100	250	ASTM D5
Ductility 77°F (25 °C) 5cm/min cm	40	-	ASTM D113
Solubility in trichloroethylene %	97.50	-	ASTM D2042

Based on AASHTO M208-2


ROLLY JAY B. BACARA
Engineer II
Maintenance Section