


Department of Public Works and Highways

Contract ID: **25LD0155**
 Contract Name: **Construction of Multi-Purpose Building Barangay Poblacion, Magsaysay, Davao del Sur Municipality of Magsaysay, Davao del Sur**
 Location of the Contract: **Magsaysay, Davao del Sur**

Davao del Sur District Engineering Office
 Digos City, Davao del Sur

SUPPLEMENTAL BULLETIN NO. 2025-078

June 11, 2025

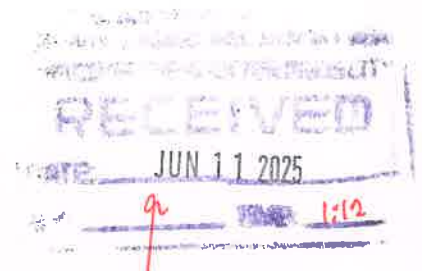

SUBJECT: Amendment of Minimum Major Equipment Requirements and Bill of Quantities (BOQ)

This Supplemental Bulletin No. 2025-078 is issued to amend provisions in the Bidding Documents (BDs) for the above stated contract, as follows:

Current Provision of BDs (Including Previous Amendments)				Amended Provision under this Supplemental Bulletin				Remarks
MINIMUM MAJOR EQUIPMENT REQUIREMENTS								
Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	
1	Stake Cargo/Service Truck	9-10 mt	1	1	Stake Cargo/Service Truck	9-10 mt	1	No Change
2	Backhoe	0.80m³/ 1.04yd³	1	2	Backhoe	0.80m³/ 1.04yd³	1	No Change
3	Dump Truck	12yd³/ 10m³	2	3	Dump Truck	12yd³/ 10m³	2	No Change
4	Plate Compactor, 400-500 Gasoline Engine	5 Hp	1	4	Plate Compactor, 400-500 Gasoline Engine	5 Hp	1	No Change
5	One Bagger Mixer	4-6 ft³/min	2	5	One Bagger Mixer	4-6 ft³/min	2	No Change
6	Bar Cutter, Single Phase	25mm Rebar Ø	2	6	Bar Cutter, Single Phase	25mm Rebar Ø	2	No Change
7	Bar Bender, Three Phase	25mm Rebar Ø	2	7	Bar Bender, Three Phase	25mm Rebar Ø	2	No Change
8	Welding Machine, Electric Driven/DC Output	500 Amperes	2	8	Welding Machine, Electric Driven/DC Output	500 Amperes	2	No Change
9	Cutting Outfit	-	2	9	Cutting Outfit	-	2	No Change
10	Eletric Handrill (w/ reverse) and ext'n chords	0.00	1	10	Eletric Handrill (w/ reverse) and ext'n chords		1	No Change
				11	<u>Backhoe w/ breaker</u>	<u>0.80m³</u>	<u>1</u>	<u>Additional Equipment</u>

Current Provision of BDs (Including Previous Amendments)				Amended Provision under this Supplemental Bulletin				Remarks
BILL OF QUANTITIES (BOQ)								
Pay Item No.	Description	Unit	Quantity	Pay Item No.	Description	Unit	Quantity	
PART B. OTHER GENERAL REQUIREMENTS				PART B. OTHER GENERAL REQUIREMENTS				
B.3(1)	Permits and Clearances	Lump sum	1.00	B.3(1)	Permits and Clearances	Lump sum	1.00	No Change
B.5(1)	Project Billboard / Signboard	Each	2.00	B.5(1)	Project Billboard / Signboard	Each	2.00	No Change
B.7(1)	Occupational Safety and Health	Lump sum	1.00	B.7(1)	Occupational Safety and Health	Lump sum	1.00	No Change
B.9(1)	Mobilization/ Demobilization	Lump sum	1.00	B.9(1)	Mobilization/ Demobilization	Lump sum	1.00	No Change
DIVISION I. GENERAL				DIVISION I. GENERAL				
PART C. EARTHWORK				PART C. EARTHWORK				
801(1)	Removal of Structures and Obstruction	Lump sum	1.00	801(1)	Removal of Structures and Obstruction	Lump sum	1.00	No Change
803(1)a	Structure Excavation, Common Soil	Cubic Meter	152.20	803(1)a	Structure Excavation, Common Soil	Cubic Meter	152.20	No Change
804(1)a	Embankment from Roadway/ Structure Excavation, Common Soil	Cubic Meter	50.00	804(1)a	Embankment from Roadway/ Structure Excavation, Common Soil	Cubic Meter	50.00	No Change
804(2)a	Embankment, From Borrow	Cubic Meter	223.00	804(2)a	Embankment from Borrow, Common Soil	Cubic Meter	223.00	Corrected Description
804(7)	Gravel fill	Cubic Meter	33.00	804(7)	Gravel fill	Cubic Meter	33.00	No Change
PART D. PLAIN AND REINFORCED CONCRETE WORK				PART D. PLAIN AND REINFORCED CONCRETE WORK				
900(1)c	Structural Concrete, 3000 psi, Class A, 28 days	Cubic Meter	31.00	900(1)c	Structural Concrete, 3000 psi, Class A, 28 days	Cubic Meter	31.00	No Change
900(1)d	Structural Concrete, 4000 psi, Class A, 28 days	Cubic Meter	49.00	900(1)d	Structural Concrete, 4000 psi, Class A, 28 days	Cubic Meter	49.00	No Change
902(1)a1	Reinforcing Steel (Deformed), Grade 40	Kilogram	7,054.76	902(1)a1	Reinforcing Steel (Deformed), Grade 40	Kilogram	7,054.76	No Change
902(1)a2	Reinforcing Steel (Deformed), Grade 60	Kilogram	5,502.89	902(1)a2	Reinforcing Steel (Deformed), Grade 60	Kilogram	5,502.89	No Change
903(2)	Formworks and Falseworks	Square Meter	240.00	903(2)	Formworks and Falseworks	Square Meter	240.00	No Change
DIVISION II. BUILDINGS				DIVISION II. BUILDINGS				
PART E. FINISHING AND OTHER CIVIL WORKS				PART E. FINISHING AND OTHER CIVIL WORKS				
1046(2)a1	CHB Non Load Bearing (including Reinforcing Steel), 100 mm thk	Square Meter	476.20	1046(2)a1	CHB Non Load Bearing (including Reinforcing Steel), 100 mm thk	Square Meter	476.20	No Change

1003(17)	Carpentry and Joinery Works	Lump sum	1.00	1003(17)	Carpentry and Joinery Works	Lump sum	1.00	No Change
1004(2)	Finishing Hardware	Lump sum	1.00	1004(2)	Finishing Hardware	Lump sum	1.00	No Change
1007(1)b	Aluminum Framed Glass Door, Swing Type	Square Meter	19.70	1007(1)b	Aluminum Framed Glass Door, Swing Type	Square Meter	19.70	No Change
1008(1)a	Aluminum Glass Windows, Sliding Type	Square Meter	21.20	1008(1)a	Aluminum Glass Windows, Sliding Type	Square Meter	21.20	No Change
1008(1)c	Aluminum Glass Windows, Awning Type	Square Meter	24.48	1008(1)c	Aluminum Glass Windows, Awning Type	Square Meter	24.48	No Change
1008(1)d	Aluminum Glass Windows, Fixed Type	Square Meter	42.30	1008(1)d	Aluminum Glass Windows, Fixed Type	Square Meter	42.30	No Change
1010(1)	Frames (Jambs, Sill, Head, Transoms, and Mullions)	Set	8.00	1010(1)	Frames (Jambs, Sill, Head, Transoms, and Mullions)	Set	8.00	No Change
1010(2)b	Doors, Wood Panel	Square Meter	13.00	1010(2)b	Doors, Wood Panel	Square Meter	13.00	No Change
1003(1)a1	Ceiling, 4.5mm Thk., Metal Frame, Fiber Cement Board	Square Meter	174.00	1003(1)a1	Ceiling, 4.5mm Thk., Metal Frame, Fiber Cement Board	Square Meter	174.00	No Change
1018(1)	Glazed Tiles and Trims	Square Meter	290.00	1018(1)	Glazed Tiles and Trims	Square Meter	290.00	No Change
1018(2)	Unglazed Tiles	Square Meter	65.00	1018(2)	Unglazed Tiles	Square Meter	65.00	No Change
<u>1021(1)a</u>	<u>Cement Floor Finish, Plain</u>	<u>Square Meter</u>	<u>19.00</u>					<u>Deleted Pay Item</u>
1027(1)	Cement Plaster Finish	Square Meter	999.40	1027(1)	Cement Plaster Finish	Square Meter	999.40	No Change
1038(1)	Reflective Insulation	Square Meter	240.00	1038(1)	Reflective Insulation	Square Meter	240.00	No Change
1039(1)	Aluminum Cladding	Square Meter	182.00	1039(1)	Aluminum Cladding	Square Meter	182.00	No Change
1051(8)	Railing	Lump sum	1.00	1051(8)	Railing	Lump sum	1.00	No Change
1032(1)a	Painting Works, Masonry/Concrete	Square Meter	1,371.00	1032(1)a	Painting Works, Masonry/Concrete	Square Meter	1,371.00	No Change
1032(1)c	Painting Works, Steel	Square Meter	345.00	1032(1)c	Painting Works, Steel	Square Meter	345.00	No Change
1013(2)b	Fabricated Metal Roofing Accessory, Gauge 26, Flashings	Linear Meter	44.00	1013(2)b	Fabricated Metal Roofing Accessory, Gauge 26, Flashings	Linear Meter	44.00	No Change

1013(2)c	Fabricated Metal Roofing Accessory, Gauge 24, Gutters	Linear Meter	20.00	1013(2)c	Fabricated Metal Roofing Accessory, Gauge 24, Gutters	Linear Meter	20.00	No Change
1014(1)b2	Prepainted Metal Sheets, above 0.427mm Thk., Rib Type, Long Span	Square Meter	300.00	1014(1)b2	Prepainted Metal Sheets, above 0.427mm Thk., Rib Type, Long Span	Square Meter	300.00	No Change
1047(2)	Metal Structures	Meter	1.00	1047(2)	Metal Structures	Meter	1.00	No Change
1047(4)b	Metal Structure Accessories, Turnbuckle	Each	20.00	1047(4)b	Metal Structure Accessories, Turnbuckle	Each	20.00	No Change
1047(5)a	Metal Structure Accessories, Bolts and Rods	Kilogram	6.41	1047(5)a	Metal Structure Accessories, Bolts and Rods	Kilogram	6.41	No Change
1047(5)b	Metal Structure Accessories, Sagrods	Kilogram	53.28	1047(5)b	Metal Structure Accessories, Sagrods	Kilogram	53.28	No Change
1047(5)c	Metal Structure Accessories, Cross Bracing	Kilogram	115.70	1047(5)c	Metal Structure Accessories, Cross Bracing	Kilogram	115.70	No Change
1047(8)a	Structural Steel, Trusses	Kilogram	2,565.66	1047(8)a	Structural Steel, Trusses	Kilogram	2,565.66	No Change
1047(8)b	Structural Steel, Purlins	Kilogram	1,592.64	1047(8)b	Structural Steel, Purlins	Kilogram	1,592.64	No Change
1001(5)b	Catch Basin (CHB)	Each	6.00	1001(5)b	Catch Basin (CHB)	Each	6.00	No Change
1001(8)	Sewer Line Works	Lump Sum	1.00	1001(8)	Sewer Line Works	Lump Sum	1.00	No Change
1001(9)	Storm Drainage and Downspout	Lump Sum	1.00	1001(9)	Storm Drainage and Downspout	Lump Sum	1.00	No Change
1001(11)	Septic Vault (Concrete/CHB)	Lump Sum	1.00	1001(11)	Septic Vault (Concrete/CHB)	Lump Sum	1.00	No Change
1002(4)	Plumbing Fixtures	Lump Sum	1.00	1002(4)	Plumbing Fixtures	Lump Sum	1.00	No Change
1002(24)	Cold Water Lines	Lump Sum	1.00	1002(24)	Cold Water Lines	Lump Sum	1.00	No Change
PART F. ELECTRICAL				PART F. ELECTRICAL				
1100(10)	Conduits, Boxes & Fittings (Conduit Works/Conduit Rough-in)	Lump sum	1.00	1100(10)	Conduits, Boxes & Fittings (Conduit Works/Conduit Rough-in)	Lump sum	1.00	No Change
1101(33)	Wires and Wiring Devices	Lump sum	1.00	1101(33)	Wires and Wiring Devices	Lump sum	1.00	No Change
1102(1)	Panelboard with Main & Branch Breakers	Lump sum	1.00	1102(1)	Panelboard with Main & Branch Breakers	Lump sum	1.00	No Change

1102(10)	Pole Mounted Distribution Transformer (OISC) with Complete Accessories, Pole type	Lump sum	1.00	1102(10)	Pole Mounted Distribution Transformer (OISC) with Complete Accessories, Pole type	Lump sum	1.00	No Change
1103(1)	Lighting Fixtures	Lump Sum	1.00	1103(1)	Lighting Fixtures	Lump Sum	1.00	No Change
PART G. MECHANICAL				PART G. MECHANICAL				
1200(13)a	<i>Airconditioning, Package/Split type</i>	<i>Lump sum</i>	<i>1.00</i>					<i>Deleted Pay Item</i>
1202(6)a1	Fire Extinguisher, 10 lbs., ABC with bracket	Set	10.00	1202(6)a1	Fire Extinguisher, 10 lbs., ABC with bracket	Set	10.00	No Change
1202(6)a3	Fire Extinguisher, 10 lbs., CO2/HCFC123 with bracket	Set	10.00	1202(6)a3	Fire Extinguisher, 10 lbs., CO2/HCFC123 with bracket	Set	10.00	No Change
1208(2)	Smoke Detector with base	Set	23.00	1208(2)	Smoke Detector with base	Set	23.00	No Change

This Supplemental Bulletin shall form an integral part of the Bidding Documents.

For the guidance and information of all concerned.

ROMEO C. CANIBAN
 Chief, Construction Section
 BAC Chairperson