


Department of Public Works and Highways

Contract ID: **25LD0156**
 Contract Name: **Construction (Completion) (TVE/TLE Laboratory Building) at the Digos City National High School, Digos City, Davao del Sur**
 Location of the Contract: **Digos City, Davao del Sur**

Davao del Sur District Engineering Office
 Digos City, Davao del Sur

SUPPLEMENTAL BULLETIN NO. 2025-079
 June 11, 2025

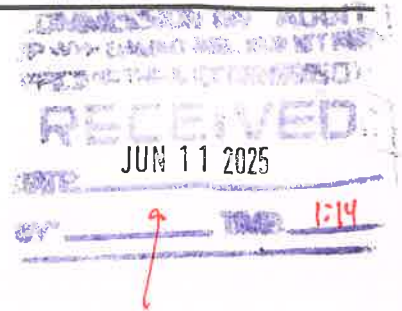

SUBJECT: Amendment of Minimum Major Equipment Requirements and Bill of Quantities (BOQ)

This Supplemental Bulletin No. 2025-079 is issued to amend provisions in the Bidding Documents (BDs) for the above stated contract, as follows:

Current Provision of BDs				Amended Provision under this Supplemental Bulletin				Remarks
MINIMUM MAJOR EQUIPMENT REQUIREMENTS								
Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	
1	Stake Cargo/Service Truck	9-10 mt	1	1	Stake Cargo/Service Truck	9-10 mt	1	No Change
2	Backhoe	0.80m³/ 1.04yd³	1	2	Backhoe	0.80m³/ 1.04yd³	1	No Change
3	Dump Truck	12yd³/ 10m³	2	3	Dump Truck	12yd³/ 10m³	2	No Change
4	Plate Compactor, 400-500 Gasoline Engine	5 Hp	1	4	Plate Compactor, 400-500 Gasoline Engine	5 Hp	1	No Change
5	One Bagger Mixer	4-6 ft³/min	1	5	One Bagger Mixer	4-6 ft³/min	1	No Change
6	Bar Cutter, Single Phase	25mm Rebar Ø	1	6	Bar Cutter, Single Phase	25mm Rebar Ø	1	No Change
7	Bar Bender, Three Phase	25mm Rebar Ø	1	7	Bar Bender, Three Phase	25mm Rebar Ø	1	No Change
8	Welding Machine, Electric Driven/DC Output	500 Amperes	2	8	Welding Machine, Electric Driven/DC Output	500 Amperes	2	No Change
9	Cutting Outfit	-	1	9	Cutting Outfit	-	1	No Change
				10	Boom Truck	2-5 mt	1	Additional Equipment

Current Provision of BDs (Including Previous Amendments)				Amended Provision under this Supplemental Bulletin				Remarks
BILL OF QUANTITIES (BOQ)								
Pay Item No.	Description	Unit	Quantity	Pay Item No.	Description	Unit	Quantity	
PART B. OTHER GENERAL REQUIREMENTS				PART B. OTHER GENERAL REQUIREMENTS				
B.3(1)	Permits and Clearances	Lump sum	1.00	B.3(1)	Permits and Clearances	Lump sum	1.00	No Change
B.5(1)	Project Billboard / Signboard	Each	2.00	B.5(1)	Project Billboard / Signboard	Each	2.00	No Change


B.7(1)	Occupational Safety and Health	Lump sum	1.00	B.7(1)	Occupational Safety and Health	Lump sum	1.00	No Change
B.9(1)	Mobilization / Demobilization	Lump sum	1.00	B.9(1)	Mobilization / Demobilization	Lump sum	1.00	No Change
DIVISION I. GENERAL				DIVISION I. GENERAL				
PART C. EARTHWORK				PART C. EARTHWORK				
803(1)a	Structure Excavation, Common Soil	Cubic Meter	74.00	803(1)a	Structure Excavation, Common Soil	Cubic Meter	74.00	No Change
804(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	29.00	804(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	29.00	No Change
804(2)a	Embankment from Borrow, Common Soil	Cubic Meter	<u>50.00</u>	804(2)a	Embankment from Borrow, Common Soil	Cubic Meter	51.00	<u>Amended Quantity</u>
804(7)	Gravel Fill	Cubic Meter	<u>26.00</u>	804(7)	Gravel Fill	Cubic Meter	25.00	<u>Amended Quantity</u>
PART D. PLAIN AND REINFORCED CONCRETE WORK				PART D. PLAIN AND REINFORCED CONCRETE WORK				
900(1)c	Structural Concrete, 3000 psi, Class A, 28 days	Cubic Meter	<u>19.00</u>	900(1)c	Structural Concrete, 3000 psi, Class A, 28 days	Cubic Meter	18.00	<u>Amended Quantity</u>
900(1)d	Structural Concrete, 4000 psi, Class A, 28 days	Cubic Meter	<u>58.00</u>	900(1)d	Structural Concrete, 4000 psi, Class A, 28 days	Cubic Meter	56.00	<u>Amended Quantity</u>
902(1)a1	Reinforcing Steel (Deformed), Grade 40	Kilogram	<u>4,794.53</u>	902(1)a1	Reinforcing Steel (Deformed), Grade 40	Kilogram	4,552.62	<u>Amended Quantity</u>
902(1)a2	Reinforcing Steel (Deformed), Grade 60	Kilogram	<u>6,185.21</u>	902(1)a2	Reinforcing Steel (Deformed), Grade 60	Kilogram	6,178.10	<u>Amended Quantity</u>
903(2)	Formworks and Falseworks	Square Meter	126.00	903(2)	Formworks and Falseworks	Square Meter	126.00	No Change
DIVISION II. BUILDINGS				DIVISION II. BUILDINGS				
PART E. FINISHINGS AND OTHER CIVIL WORKS				PART E. FINISHINGS AND OTHER CIVIL WORKS				
1046(2)a1	CHB Non-Load Bearing (including Reinforcing Steel), 100 mm thk.	Square Meter	<u>18.00</u>	1046(2)a1	CHB Non-Load Bearing (including Reinforcing Steel), 100 mm thk.	Square Meter	14.00	<u>Amended Quantity</u>
1046(2)a2	CHB Non-Load Bearing (including Reinforcing Steel), 150 mm thk.	Square Meter	<u>156.00</u>	1046(2)a2	CHB Non-Load Bearing (including Reinforcing Steel), 150 mm thk.	Square Meter	143.00	<u>Amended Quantity</u>
1003(17)	Carpentry and Joinery Works	Lump sum	1.00	1003(17)	Carpentry and Joinery Works	Lump sum	1.00	No Change
1004(2)	Finishing Hardware	Lump sum	1.00	1004(2)	Finishing Hardware	Lump sum	1.00	No Change
1005(5)	<u>Steel Window</u>	<u>Lump sum</u>	<u>1.00</u>					<u>Deleted Pay Item</u>
1009(1)a	<u>Jalousie Windows, Glass</u>	<u>Square Meter</u>	<u>22.88</u>					<u>Deleted Pay Item</u>
				1008(1)c	Aluminum Glass Windows, Awning Type	Square Meter	11.11	Additional Pay Item

				1008(1)d	Aluminum Glass Windows, Fixed Type	Square Meter	5.82	Additional Pay Item
1010(1)	Frames (Jambs, Sill, Head, Transoms and Mullions)	Set	<u>4.00</u>	1010(1)	Frames (Jambs, Sill, Head, Transoms and Mullions)	Set	3.00	Amended Quantity
				1010(2)a	Doors, Flush	Square Meter	1.89	Additional Pay Item
1010(2)b	Doors, Wood Panel	Square Meter	<u>8.40</u>	1010(2)b	Doors, Wood Panel	Square Meter	3.78	Amended Quantity
				1011(1)a	Roof-Up Door, Steel	Set	2.00	Additional Pay Item
1003(1)a1	Ceiling, 4.5mm Thk., Metal Frame, Fiber Cement Board	Square Meter	214.00	1003(1)a1	Ceiling, 4.5mm Thk., Metal Frame, Fiber Cement Board	Square Meter	214.00	No Change
				1003(2)a3	Wall, 6mm thk., Metal Frame, Fiber Cement Board	Square Meter	18.00	Additional Pay Item
1016(1)b	Waterproofing, Liquid	Square Meter	<u>94.00</u>	1016(1)b	Waterproofing, Liquid	Square Meter	92.00	Amended Quantity
				1018(1)	Glazed Tiles and Trims	Square Meter	15.00	Additional Pay Item
				1018(2)	Unglazed Tiles	Square Meter	4.00	Additional Pay Item
1021(1)a	<i>Cement Floor Finish, Plain</i>	<i>Square Meter</i>	<i>193.00</i>					<i>Deleted Pay Item</i>
1027(1)	Cement Plaster Finish	Square Meter	<u>498.00</u>	1027(1)	Cement Plaster Finish	Square Meter	452.00	Amended Quantity
1038(1)	<i>Reflective Insulation</i>	<i>Square Meter</i>	<i>183.00</i>					<i>Deleted Pay Item</i>
1051(8)	Railing	Lump sum	1.00	1051(8)	Railing	Lump sum	1.00	No Change
1032(1)a	Painting Works, Masonry/Concrete	Square Meter	<u>804.00</u>	1032(1)a	Painting Works, Masonry/Concrete	Square Meter	768.00	Amended Quantity
1032(1)b	Painting Works, Wood	Square Meter	<u>25.00</u>	1032(1)b	Painting Works, Wood	Square Meter	17.00	Amended Quantity
1032(1)c	Painting Works, Steel	Square Meter	<u>370.00</u>	1032(1)c	Painting Works, Steel	Square Meter	298.00	Amended Quantity
1013(2)a	Fabricated Metal Roofing Accessory, Gauge 26 (0.551 mm), Ridge/Hip Rolls	Linear Meter	18.00	1013(2)a	Fabricated Metal Roofing Accessory, Gauge 26 (0.551 mm), Ridge/Hip Rolls	Linear Meter	18.00	No Change
1013(2)b	Fabricated Metal Roofing Accessory, Gauge 26 (0.551 mm), Flashings	Linear Meter	20.00	1013(2)b	Fabricated Metal Roofing Accessory, Gauge 26 (0.551 mm), Flashings	Linear Meter	20.00	No Change
1014(1)a2	Pre-painted Metal Sheets, above 0.427 mm thk., Corrugated Type, Long Span	Square Meter	229.00	1014(1)a2	Pre-painted Metal Sheets, above 0.427 mm thk., Corrugated Type, Long Span	Square Meter	229.00	No Change
1047(4)b	Metal Structure Accessories, Turnbuckle	Each	32.00	1047(4)b	Metal Structure Accessories, Turnbuckle	Each	32.00	No Change

1047(5)a	Metal Structure Accessories, Bolts and Rods	Kilogram	40.95	1047(5)a	Metal Structure Accessories, Bolts and Rods	Kilogram	40.95	No Change
1047(5)b	Metal Structure Accessories, Sagrods	Kilogram	72.17	1047(5)b	Metal Structure Accessories, Sagrods	Kilogram	72.17	No Change
1047(5)c	Metal Structure Accessories, Cross Bracing	Kilogram	96.42	1047(5)c	Metal Structure Accessories, Cross Bracing	Kilogram	96.42	No Change
1047(5)d	Metal Structure Accessories, Steel Plates	Kilogram	462.05	1047(5)d	Metal Structure Accessories, Steel Plates	Kilogram	462.05	No Change
1047(8)a	Structural Steel, Trusses	Kilogram	1,982.74	1047(8)a	Structural Steel, Trusses	Kilogram	1,982.74	No Change
1047(8)b	Structural Steel, Purlins	Kilogram	1,865.16	1047(8)b	Structural Steel, Purlins	Kilogram	1,865.16	No Change
1001(5)b	Catch Basin, CHB	Each	<u>10.00</u>	1001(5)b	Catch Basin, CHB	Each	<u>9.00</u>	Amended Quantity
1001(8)	Sewer Line Works	Lump sum	1.00	1001(8)	Sewer Line Works	Lump sum	1.00	No Change
1001(9)	Storm Drainage and Downspout	Lump sum	1.00	1001(9)	Storm Drainage and Downspout	Lump sum	1.00	No Change
				1001(11)	<u>Septic Vault / Tank, Concrete/CHB</u>	<u>Lump sum</u>	<u>1.00</u>	Additional Pay Item
1002(4)	Plumbing Fixtures	Lump sum	1.00	1002(4)	Plumbing Fixtures	Lump sum	1.00	No Change
1002(24)	Cold Water Lines	Lump sum	1.00	1002(24)	Cold Water Lines	Lump sum	1.00	No Change
PART F. ELECTRICAL				PART F. ELECTRICAL				
1100(10)	Conduits, Boxes & Fittings (Conduit Works/Conduit Rough-in)	Lump sum	1.00	1100(10)	Conduits, Boxes & Fittings (Conduit Works/Conduit Rough-in)	Lump sum	1.00	No Change
1101(33)	Wires and Wiring Devices	Lump sum	1.00	1101(33)	Wires and Wiring Devices	Lump sum	1.00	No Change
1102(1)	Panelboard with Main & Branch Breakers	Lump sum	1.00	1102(1)	Panelboard with Main & Branch Breakers	Lump sum	1.00	No Change
1103(1)	Lighting Fixtures	Lump sum	1.00	1103(1)	Lighting Fixtures	Lump sum	1.00	No Change

This Supplemental Bulletin shall form an integral part of the Bidding Documents.

For the guidance and information of all concerned.


ROMEO C. CANIBAN
 Chief, Construction Section
 BAC Chairperson