


Department of Public Works and Highways

Contract ID: **25LD0161**
 Contract Name: **Construction of Technical and Vocational Training Center in Barangay Zone 3, Digos City, Davao del Sur**
 Location of the Contract: **Digos City, Davao del Sur**

Davao del Sur District Engineering Office
 Digos City, Davao del Sur

SUPPLEMENTAL BULLETIN NO. 2025-080
 June 11, 2025

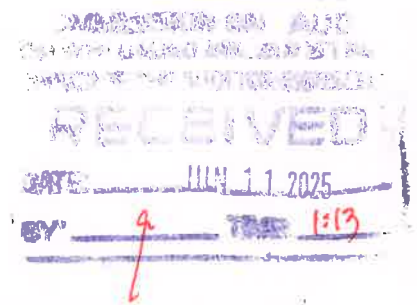

SUBJECT: Amendment of Minimum Major Equipment Requirements and Bill of Quantities (BOQ)

This Supplemental Bulletin No. 2025-080 is issued to amend provisions in the Bidding Documents (BDs) for the above stated contract, as follows:

Current Provision of BDs (Including Previous Amendments)				Amended Provision under this Supplemental Bulletin				Remarks
MINIMUM MAJOR EQUIPMENT REQUIREMENTS								
Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	
1	Stake Cargo/Service Truck	9-10 mt	1	1	Stake Cargo/Service Truck	9-10 mt	1	No Change
2	Backhoe	0.80m³/ 1.04yd³	1	2	Backhoe	0.80m³/ 1.04yd³	1	No Change
3	Dump Truck	12yd³/ 9.17m³	2	3	Dump Truck	12yd³/ 9.17m³	2	No Change
4	Plate Compactor, 400-500 Gasoline Engine	5 Hp	1	4	Plate Compactor, 400-500 Gasoline Engine	5 Hp	1	No Change
5	One Bagger Mixer	4-6 ft³/min	1	5	One Bagger Mixer	4-6 ft³/min	1	No Change
6	Bar Cutter, Single Phase	25mm Rebar Ø	1	6	Bar Cutter, Single Phase	25mm Rebar Ø	1	No Change
7	Bar Bender, Three Phase	25mm Rebar Ø	1	7	Bar Bender, Three Phase	25mm Rebar Ø	1	No Change
8	Welding Machine, Electric Driven/DC Output	500 Amperes	2	8	Welding Machine, Electric Driven/DC Output	500 Amperes	2	No Change
9	Cutting Outfit	-	1	9	Cutting Outfit	-	1	No Change
10	Backhoe with Breaker	0.80m³/ 1.04yd³	1					Deleted Equipment
11	Boom Truck	-	1	10	Boom Truck	-	1	No Change
12	Eletric Handrill	(w/ reverse and ext'n	1	11	Eletric Handrill	(w/ reverse and ext'n	1	No Change

Current Provision of BDs (Including Previous Amendments)				Amended Provision under this Supplemental Bulletin				Remarks
BILL OF QUANTITIES (BOQ)								
Pay Item No.	Description	Unit	Quantity	Pay Item No.	Description	Unit	Quantity	
PART B. OTHER GENERAL REQUIREMENTS				PART B. OTHER GENERAL REQUIREMENTS				
B.3(1)	Permits and Clearances	Lump sum	1.00	B.3(1)	Permits and Clearances	Lump sum	1.00	No Change
B.5(1)	Project Billboard / Signboard	Each	2.00	B.5(1)	Project Billboard / Signboard	Each	2.00	No Change
B.7(1)	Occupational Safety and Health	Lump sum	1.00	B.7(1)	Occupational Safety and Health	Lump sum	1.00	No Change
B.9(1)	Mobilization/ Demobilization	Lump sum	1.00	B.9(1)	Mobilization/ Demobilization	Lump sum	1.00	No Change
DIVISION I GENERAL				DIVISION I. GENERAL				
PART C. EARTHWORK				PART C. EARTHWORK				
803(1)a	Structure Excavation, Common Soil	Cubic Meter	222.00	803(1)a	Structure Excavation, Common Soil	Cubic Meter	222.00	No Change
804(1)a	Embankment from Roadway/ Structure Excavation, Common Soil	Cubic Meter	155.00	804(1)a	Embankment from Roadway/ Structure Excavation, Common Soil	Cubic Meter	155.00	No Change
804(2)a	Embankment from Borrow, Common Soil	Cubic Meter	450.00	804(2)a	Embankment from Borrow, Common Soil	Cubic Meter	450.00	No Change
804(7)	Gravel fill	Cubic Meter	47.40	804(7)	Gravel fill	Cubic Meter	47.40	No Change
PART D. PLAIN AND REINFORCED CONCRETE WORK				PART D. PLAIN AND REINFORCED CONCRETE WORK				
900(1)c	Structural Concrete, 3000 psi, Class A, 28 days	Cubic Meter	34.00	900(1)c	Structural Concrete, 3000 psi, Class A, 28 days	Cubic Meter	34.00	No Change
900 (1)d	Structural Concrete, 4000 psi, Class A, 28 days	Cubic Meter	42.00	900 (1)d	Structural Concrete, 4000 psi, Class A, 28 days	Cubic Meter	42.00	No Change
902(1)a1	Reinforcing Steel (Deformed), Grade 40	Kilogram	3,946.83	902(1)a1	Reinforcing Steel (Deformed), Grade 40	Kilogram	3,946.83	No Change
902(1)a2	Reinforcing Steel (Deformed), Grade 60	Kilogram	3,835.16	902(1)a2	Reinforcing Steel (Deformed), Grade 60	Kilogram	3,835.16	No Change
903(2)	Formworks and Falseworks	Square Meter	250.00	903(2)	Formworks and Falseworks	Square Meter	250.00	No Change
DIVISION II BUILDINGS				DIVISION II. BUILDINGS				
PART E. FINISHING AND OTHER CIVIL WORKS				PART E. FINISHING AND OTHER CIVIL WORKS				
1046(2)a1	CHB Non Load Bearing (including Reinforcing Steel), 100 mm thk	Square Meter	190.50	1046(2)a1	CHB Non Load Bearing (including Reinforcing Steel), 100 mm thk	Square Meter	190.50	No Change

1003(12)	Fascia Board, Metal	Kilogram	251.33	1003(12)	Fascia Board, Metal	Kilogram	251.33	No Change
1003(17)	Carpentry and Joinery Works	Lump sum	1.00	1003(17)	Carpentry and Joinery Works	Lump sum	1.00	No Change
1004(2)	Finishing Hardware	Lump sum	1.00	1004(2)	Finishing Hardware	Lump sum	1.00	No Change
1007(1)b	Aluminum Framed Glass Door, Sliding Type	Square Meter	45.68	1007(1)b	Aluminum Framed Glass Door, Sliding Type	Square Meter	45.68	No Change
1008(1)a	Aluminum Glass Windows, Sliding Type	Square Meter	10.80	1008(1)a	Aluminum Glass Windows, Sliding Type	Square Meter	10.80	No Change
1008(1)d	Aluminum Glass Windows, Fixed Type	Square Meter	38.54	1008(1)d	Aluminum Glass Windows, Fixed Type	Square Meter	38.54	No Change
1010(1)	Frames (Jambs, Sill, Head, Transoms and Mullions	Set	5.00	1010(1)	Frames (Jambs, Sill, Head, Transoms and Mullions	Set	5.00	No Change
1010(2)a	Doors, Flush	Square Meter	1.26	1010(2)a	Doors, Flush	Square Meter	1.26	No Change
1010(2)b	Doors, Wood Panel	Square Meter	10.70	1010(2)b	Doors, Wood Panel	Square Meter	10.70	No Change
1003(1)a1	Ceiling, 4.5mm Thk., Metal Frame Fiber Cement Board	Square Meter	<u>250.00</u>	1003(1)a1	Ceiling, 4.5mm Thk., Metal Frame Fiber Cement Board	Square Meter	<u>254.00</u>	<u>Amended Quantity</u>
1003(2)b1	Wall, 6mm Thk., Metal Frame, Fiber Cement Board	Square Meter	312.10	1003(2)b1	Wall, 6mm Thk., Metal Frame, Fiber Cement Board	Square Meter	312.10	No Change
1018(1)	Glazed Tiles and Trims	Square Meter	<u>270.00</u>	1018(1)	Glazed Tiles and Trims	Square Meter	<u>276.00</u>	<u>Amended Quantity</u>
1018(2)	Unglazed Tiles	Square Meter	93.00	1018(2)	Unglazed Tiles	Square Meter	93.00	No Change
<u>1021(1)a</u>	<u>Cement Floor Finish, Plain</u>	<u>Square Meter</u>	<u>17.00</u>					<u>Deleted Pay Item</u>
1027(1)	Cement Plaster Finish	Square Meter	349.00	1027(1)	Cement Plaster Finish	Square Meter	349.00	No Change
1038(1)	Reflective Insulation	Square Meter	364.00	1038(1)	Reflective Insulation	Square Meter	364.00	No Change
1039(1)	Aluminum Cladding	Lump Sum	191.00	1039(1)	Aluminum Cladding	Lump Sum	191.00	No Change
1051(8)	Railing	Lump sum	1.00	1051(8)	Railing	Lump sum	1.00	No Change
1032(1)a	Painting Works Masonry/Concrete	Square Meter	<u>877.00</u>	1032(1)a	Painting Works Masonry/Concrete	Square Meter	<u>881.00</u>	<u>Amended Quantity</u>

1032(1)c	Painting Works, Steel	Square Meter	824.00	1032(1)c	Painting Works, Steel	Square Meter	824.00	No Change
1013(2)a	Fabricated Metal Roofing Accessory, Gauge 26 (0.551mm), Ridge/Hip Rolls	Linear Meter	28.00	1013(2)a	Fabricated Metal Roofing Accessory, Gauge 26 (0.551mm), Ridge/Hip Rolls	Linear Meter	28.00	No Change
1013(2)b	Fabricated Metal Roofing Accessory, Gauge 26 (0.551mm), Flashings	Linear Meter	28.04	1013(2)b	Fabricated Metal Roofing Accessory, Gauge 26 (0.551mm), Flashings	Linear Meter	28.04	No Change
1013(2)c	Fabricated Metal Roofing Accessory, Gauge 24 (0.701mm), Gutters	Linear Meter	56.40	1013(2)c	Fabricated Metal Roofing Accessory, Gauge 24 (0.701mm), Gutters	Linear Meter	56.40	No Change
1014(1)b2	Pre-Painted Metal Sheets, above 0.427 mm thk., Rib Type, Long Span	Square Meter	<u>425.80</u>	1014(1)b2	Pre-Painted Metal Sheets, above 0.427 mm thk., Rib Type, Long Span	Square Meter	<u>412.40</u>	<u>Amended Quantity</u>
1047(4)b	Metal Structure Accessories, Turnbuckle	Each	40.00	1047(4)b	Metal Structure Accessories, Turnbuckle	Each	40.00	No Change
1047(5)a	Metal Structure Accessories, Bolts and Rods	Kilogram	246.57	1047(5)a	Metal Structure Accessories, Bolts and Rods	Kilogram	246.57	No Change
1047(5)b	Metal Structure Accessories, Sagrods	Kilogram	104.16	1047(5)b	Metal Structure Accessories, Sagrods	Kilogram	104.16	No Change
1047(5)c	Metal Structure Accessories, Cross Bracing	Kilogram	175.16	1047(5)c	Metal Structure Accessories, Cross Bracing	Kilogram	175.16	No Change
1047(5)d	Metal Structure Accessories, Steel Plates	Kilogram	1,270.04	1047(5)d	Metal Structure Accessories, Steel Plates	Kilogram	1,270.04	No Change
1047(7)	Structural Steel	Lump Sum	1.00	1047(7)	Structural Steel	Lump Sum	1.00	No Change
1047(8)a	Structural Steel, Trusses	Kilogram	9,174.76	1047(8)a	Structural Steel, Trusses	Kilogram	9,174.76	No Change
1047(8)b	Structural Steel, Purlins	Kilogram	3,161.62	1047(8)b	Structural Steel, Purlins	Kilogram	3,161.62	No Change
1001(5)b	Catch Basin, CHB	Each	12.00	1001(5)b	Catch Basin, CHB	Each	12.00	No Change
1001(8)	Sewer Line Works	Lump Sum	1.00	1001(8)	Sewer Line Works	Lump Sum	1.00	No Change
1001(9)	Storm Drainage and Downspout	Lump sum	1.00	1001(9)	Storm Drainage and Downspout	Lump sum	1.00	No Change

1001(11)	Septic Vault/Tank, Concrete/CHB	Lump sum	1.00	1001(11)	Septic Vault/Tank, Concrete/CHB	Lump sum	1.00	No Change
1002(4)	Plumbing Fixtures	Lump sum	1.00	1002(4)	Plumbing Fixtures	Lump sum	1.00	No Change
1002(20)	Facial Mirror	Square Meter	2.65	1002(20)	Facial Mirror	Square Meter	2.65	No Change
1002(24)	Cold Water Lines	Lump sum	1.00	1002(24)	Cold Water Lines	Lump sum	1.00	No Change
PART F. ELECTRICAL				PART F. ELECTRICAL				
1100(10)	Conduits, Boxes & Fittings (Conduit Works/Conduit Rough-in)	Lump Sum	1.00	1100(10)	Conduits, Boxes & Fittings (Conduit Works/Conduit Rough-in)	Lump Sum	1.00	No Change
1101(33)	Wires and Wiring Devices	Lump sum	1.00	1101(33)	Wires and Wiring Devices	Lump sum	1.00	No Change
1102(1)	Panelboard with Main & Branch Breakers	Lump sum	1.00	1102(1)	Panelboard with Main & Branch Breakers	Lump sum	1.00	No Change
1102(10)	Pole Mounted Distribution Transformer (OISC) with Complete Accessories, Pole Type	Lump sum	1.00	1102(10)	Pole Mounted Distribution Transformer (OISC) with Complete Accessories, Pole Type	Lump sum	1.00	No Change
1103(1)	Lighting Fixtures	Lump Sum	1.00	1103(1)	Lighting Fixtures	Lump Sum	1.00	No Change
PART G. MECHANICAL				PART G. MECHANICAL				
1200(13)a	Airconditioning, Package/Split type	Lump sum	1.00	1200(13)a	Airconditioning, Package/Split type	Lump sum	1.00	No Change

This Supplemental Bulletin shall form an integral part of the Bidding Documents.

For the guidance and information of all concerned.

ROMEO C. CANIBAN
 Chief, Construction Section
 BAC Chairperson