


Department of Public Works and Highways

Contract ID: **25LD0188**
 Contract Name: **Construction of the Municipal Public Market Perimeter Road in Brgy. Lapulabao, Hagonoy, Davao del Sur**
 Location of the Contract: **Hagonoy, Davao del Sur**

Davao del Sur District Engineering Office
 Digos City, Davao del Sur

SUPPLEMENTAL BULLETIN NO. 2025-084
 June 11, 2025

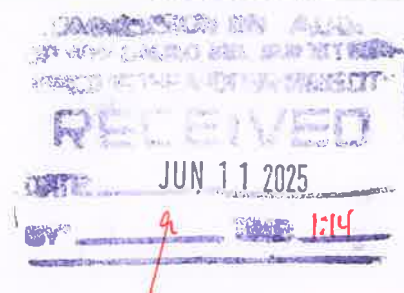

SUBJECT: Amendment of Minimum Major Equipment Requirements and Bill of Quantities (BOQ)

This Supplemental Bulletin No. 2025-084 is issued to amend provisions in the Bidding Documents (BDs) for the above stated contract, as follows:

Current Provision of BDs				Amended Provision under this Supplemental Bulletin				Remarks
MINIMUM MAJOR EQUIPMENT REQUIREMENTS								
Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	Construction Equipment		Minimum Capacity/ Unit	Required No. of Units	
1	Dump Truck	12 yd³/10 m³	2	1	Dump Truck	12 yd³/10 m³	3	<u>Corrected No. of Units</u>
2	Payloader	1.95 yd³/1.5 m³	1	2	Payloader	1.95 yd³/1.5 m³	1	No Change
3	Bulldozer	-	1	3	Bulldozer	-	1	No Change
4	Backhoe	1.04 yd³/0.8 m³	1	4	Backhoe	1.04 yd³/0.8 m³	1	No Change
5	Water Truck/Pump	16000 L	1	5	Water Truck/Pump	16000 L	1	No Change
6	Vibratory Roller	10 mt	1	6	Vibratory Roller	10 mt	1	No Change
7	Motorized Road Grader	-	1	7	Motorized Road Grader	-	1	No Change
8	Transit Mixer	5-6 yd³	4	8	Transit Mixer	5-6 yd³	4	No Change
9	Concrete Vibrator, Flexible Shaft Type 2" Head Ø, Gasoline Drive Unit	5 Amperes	2	9	Concrete Vibrator, Flexible Shaft Type 2" Head Ø, Gasoline Drive Unit	5 Amperes	2	No Change
10	Concrete Saw, 14" Blade Ø with 4¾" Cutting Depth	-	1	10	Concrete Saw, 14" Blade Ø with 4¾" Cutting Depth	-	1	No Change
11	Bar Cutter, Single Phase	25 mm RebarØ	1	11	Bar Cutter, Single Phase	25 mm RebarØ	1	No Change
12	Bar Bender, Three Phase	25 mm RebarØ	1	12	Bar Bender, Three Phase	25 mm RebarØ	1	No Change
13	Concrete Screeder, Wacker Truss Screed	-	1	13	Concrete Screeder, Wacker Truss Screed	-	1	No Change
14	Cargo/Service Truck	9-10 mt	1	14	Cargo/Service Truck	9-10 mt	1	No Change
15	Cargo/Service Truck	2-5 mt	1	15	Cargo/Service Truck	2-5 mt	1	No Change
16	One Bagger Mixer	4-6 ft³/min	1	16	One Bagger Mixer	4-6 ft³/min	1	No Change

17	Plate Compactor	5 Hp	1	17	Plate Compactor	5 Hp	1	No Change
18	Applicator Machine	-	1	18	Applicator Machine	-	1	No Change
19	Kneading Machine	-	1	19	Kneading Machine	-	1	No Change
20	Mechanized Joint Sealer (Set)	-	1	20	Mechanized Joint Sealer (Set)	-	1	No Change
21	<u>Crawler Crane</u>	<u>21-25T</u>	<u>1</u>					<u>Deleted Equipment</u>
22	Truck Mounted Crane	6-10 T	1	21	Truck Mounted Crane	6-10 T	1	No Change
23	Teleopic Manlift, 60ft. Max. Working Height	60 H	1	22	Teleopic Manlift, 60ft. Max. Working Height	60 H	1	No Change
				23	<u>Backhoe w/ Breaker</u>	<u>1.04 yd³ / 0.8 m³</u>	<u>1</u>	<u>Additional Equipment</u>

Current Provision of BDs				Amended Provision under this Supplemental Bulletin				Remarks
BILL OF QUANTITIES (BOQ)								
Pay Item No.	Description	Unit	Quantity	Pay Item No.	Description	Unit	Quantity	
PART B. OTHER GENERAL REQUIREMENTS				PART B. OTHER GENERAL REQUIREMENTS				
B.5	Project Billboard / Signboard	Each	3.00	B.5	Project Billboard / Signboard	Each	3.00	No Change
B.7(2)	Occupational Safety and Health Program	Lump sum	1.00	B.7(2)	Occupational Safety and Health Program	Lump sum	1.00	No Change
B.8(2)	Traffic Management	Lump sum	1.00	B.8(2)	Traffic Management	Lump sum	1.00	No Change
B.9	Mobilization / Demobilization	Lump sum	1.00	B.9	Mobilization / Demobilization	Lump sum	1.00	No Change
PART C. EARTHWORK				PART C. EARTHWORK				
				101(1)	Removal of Structures and Obstruction	Lump Sum	1.00	Additional Pay Item
102(2)	Surplus Common Excavation	Cubic Meter	1,968.93	102(2)	Surplus Common Excavation	Cubic Meter	1,728.40	Amended Quantity
103(1)a	Structure Excavation, Common Soil	Cubic Meter	17.28	103(1)a	Structure Excavation, Common Soil	Cubic Meter	8.64	Amended Quantity
103(3)	Foundation Fill	Cubic Meter	1.73	103(3)	Foundation Fill	Cubic Meter	0.58	Amended Quantity
104(1)a	Embankment from Roadway/Structure Excavation, Common Soil	Cubic Meter	35.00					Deleted Pay Item
105(1)a	Subgrade Preparation, Common Material	Square Meter	2,859.49	105(1)a	Subgrade Preparation, Common Material	Square Meter	3,029.13	Amended Quantity
PART D. SUBBASE AND BASE COURSE				PART D. SUBBASE AND BASE COURSE				
200(1)	Aggregate Subbase Course	Cubic Meter	825.00	200(1)	Aggregate Subbase Course	Cubic Meter	757.00	Amended Quantity

PART E. SURFACE COURSES				PART E. SURFACE COURSES				
				311(1)a	Portland Cement Concrete Pavement (Unreinforced) - 0.15 m. thk., 14 days	Square Meter	412.50	Amended Quantity
311(1)d1	Portland Cement Concrete Pavement (Unreinforced) - 0.25 m. thk., 14 days	Square Meter	1,633.58	311(1)d1	Portland Cement Concrete Pavement (Unreinforced) - 0.25 m. thk., 14 days	Square Meter	1,677.50	Amended Quantity
PART F. BRIDGE CONSTRUCTION				PART F. BRIDGE CONSTRUCTION				
404(1)a	Reinforcing Steel, Grade 40	Kilogram	568.08	404(1)a	Reinforcing Steel, Grade 40	Kilogram	189.36	Amended Quantity
404(1)b	Reinforcing Steel, Grade 60	Kilogram	222.12	404(1)b	Reinforcing Steel, Grade 60	Kilogram	74.04	Amended Quantity
405(1)b3	Structural Concrete, Class A (27.58Mpa), 28 days	Cubic Meter	8.78	405(1)b3	Structural Concrete, Class A (27.58Mpa), 28 days	Cubic Meter	3.23	Amended Quantity
PART H. MISCELLANEOUS STRUCTURES				PART H. MISCELLANEOUS STRUCTURES				
612(1)	Reflectorized Thermoplastic Pavement Markings White	Square Meter	52.51	612(1)	Reflectorized Thermoplastic Pavement Markings White	Square Meter	67.03	Amended Quantity
624(9)b1	Single Arm Solar LED Roadway Lighting, 8m-Pole, 50W-80W	Each	12.00	624(9)b1	Single Arm Solar LED Roadway Lighting, 8m-Pole, 50W-80W	Each	4.00	Amended Quantity

This Supplemental Bulletin shall form an integral part of the Bidding Documents.

For the guidance and information of all concerned,


ROMEO C. CANIBAN
 Chief, Construction Section
 BAC Chairperson